



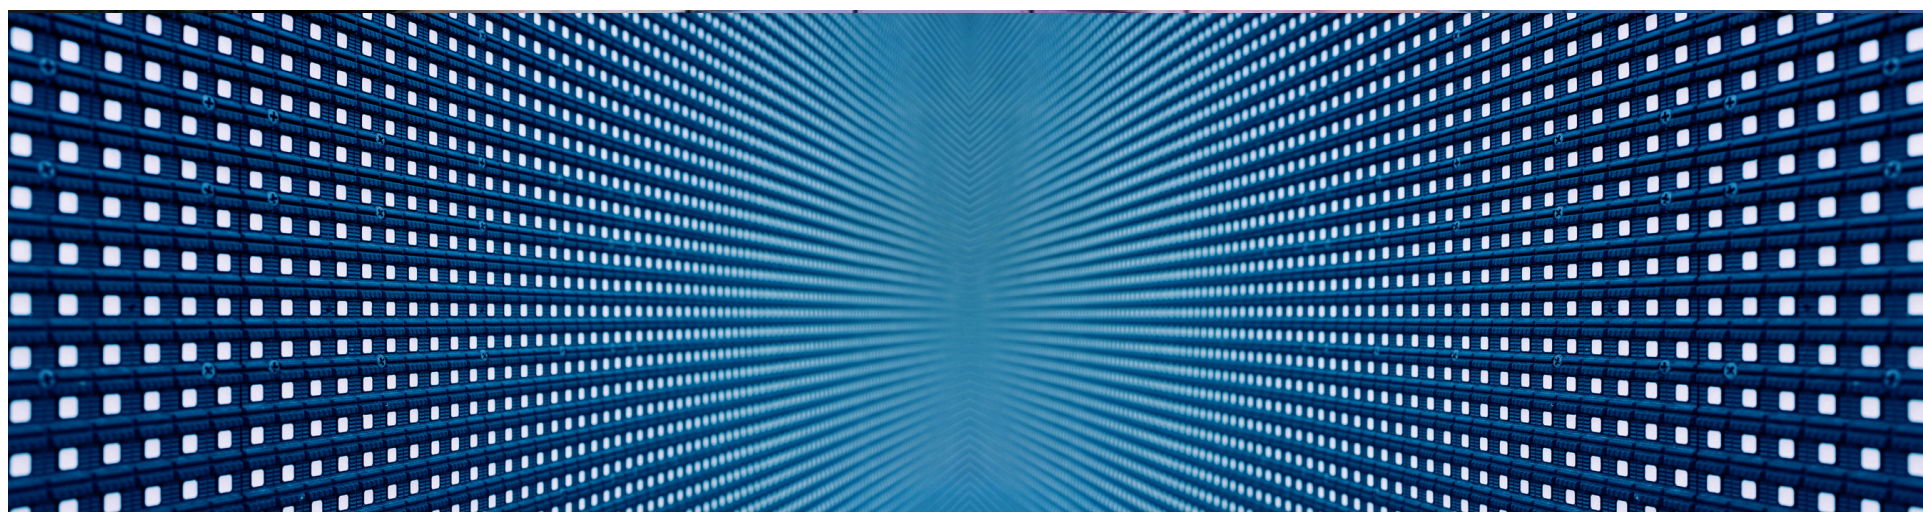

Holographic Transparent LED Displays

95-99%
Visual Transparency

75%
Energy Saving

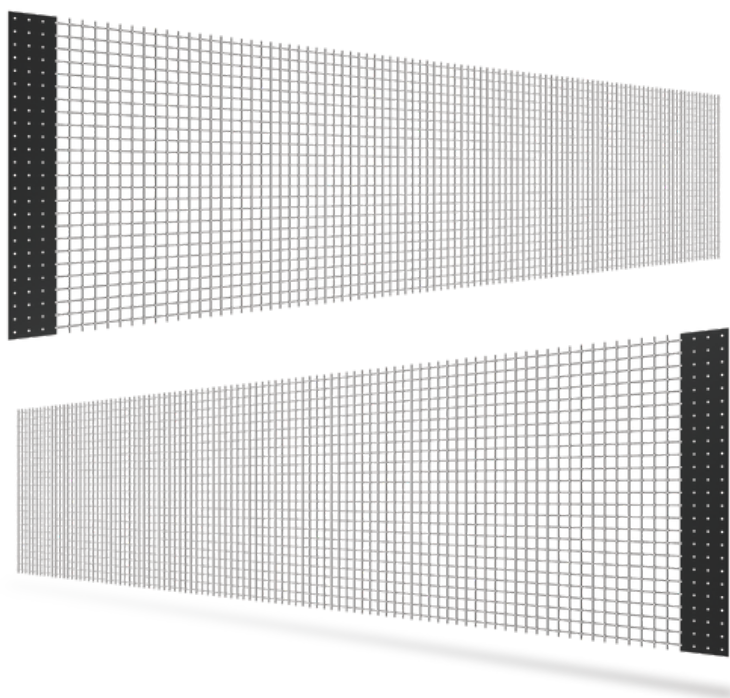

**Adjustable high
brightness**



**High definition
transparent**



Crop stitching



Ultra thin 2mm



Easy to install



Multiple displays




**Non-destructive
repair**




Multiple controls



WINDOW DISPLAY

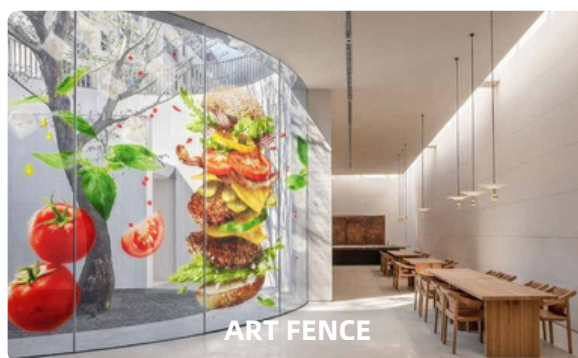

ART FENCE

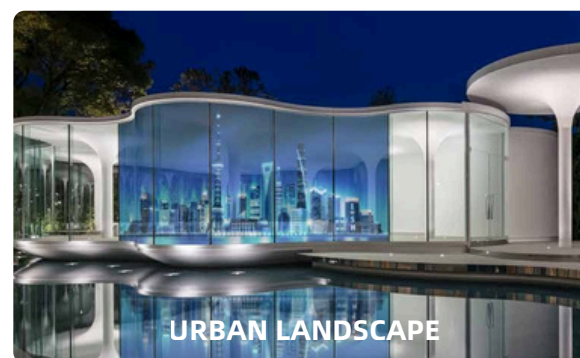

URBAN LANDSCAPE

EzzyVUE Transparent Holographic LED Screens


Email: ezzyvue.display@gmail.com Tel: +971 54 213 3869




Product Feature

Innovative Applications, Revolutionizing the Conventional.

Lightweight, Thin, Transparent, Flexible and Bendable

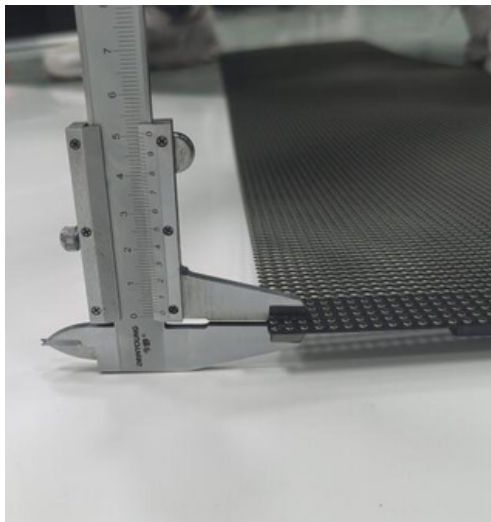


Only 2mm Thickness

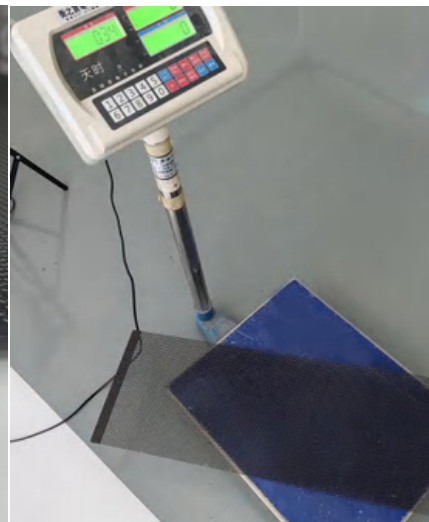

Only 0.34kg/sqm



>90% Transparency Rate

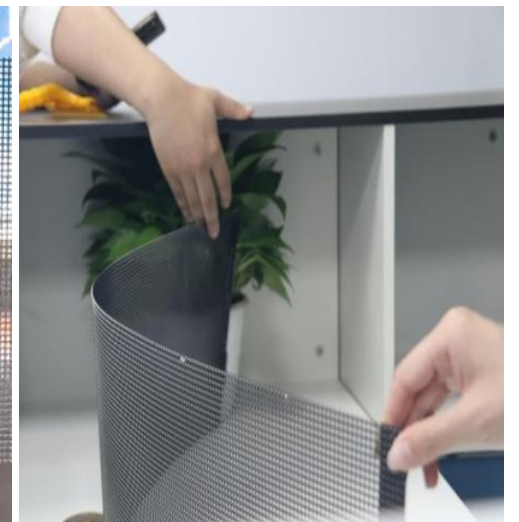


Flexible and Bendable

Can be freely cut, matched with various styles



Floating images, 3D holographic display

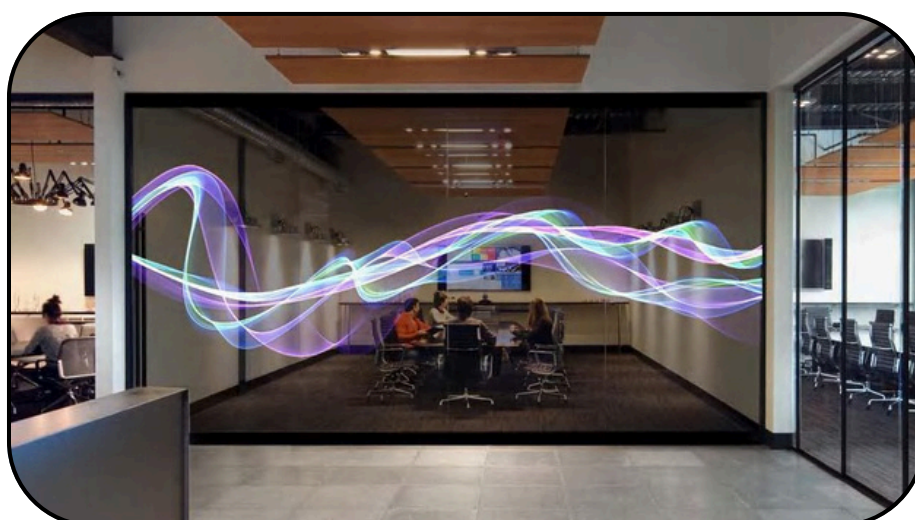

Application Scenarios

Retail & Hospitality





Retail & Hospitality




Application Scenarios

Retail & Hospitality

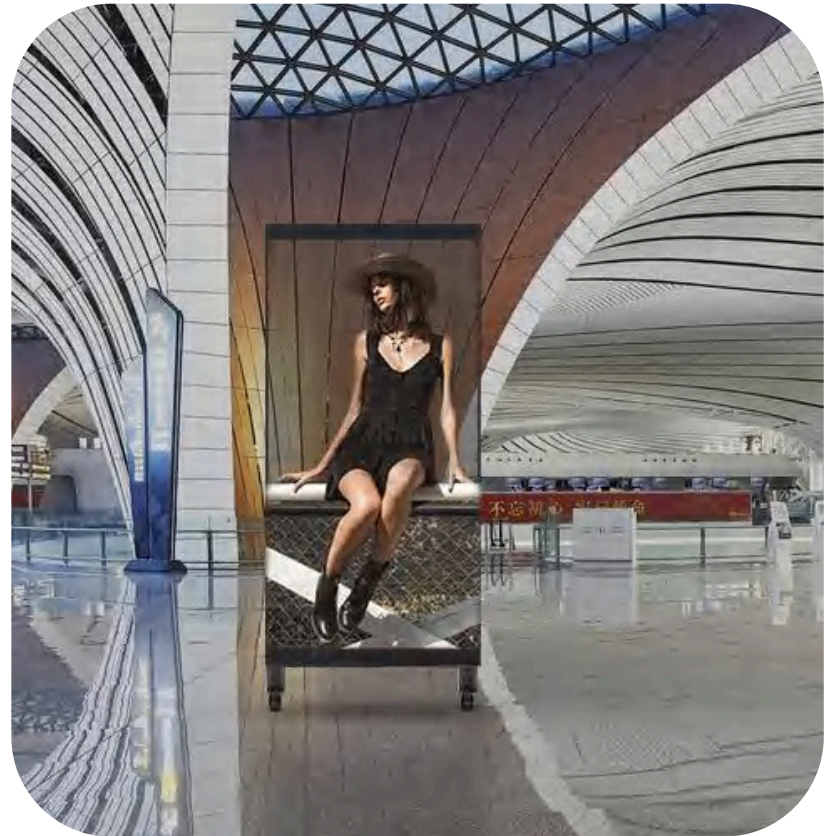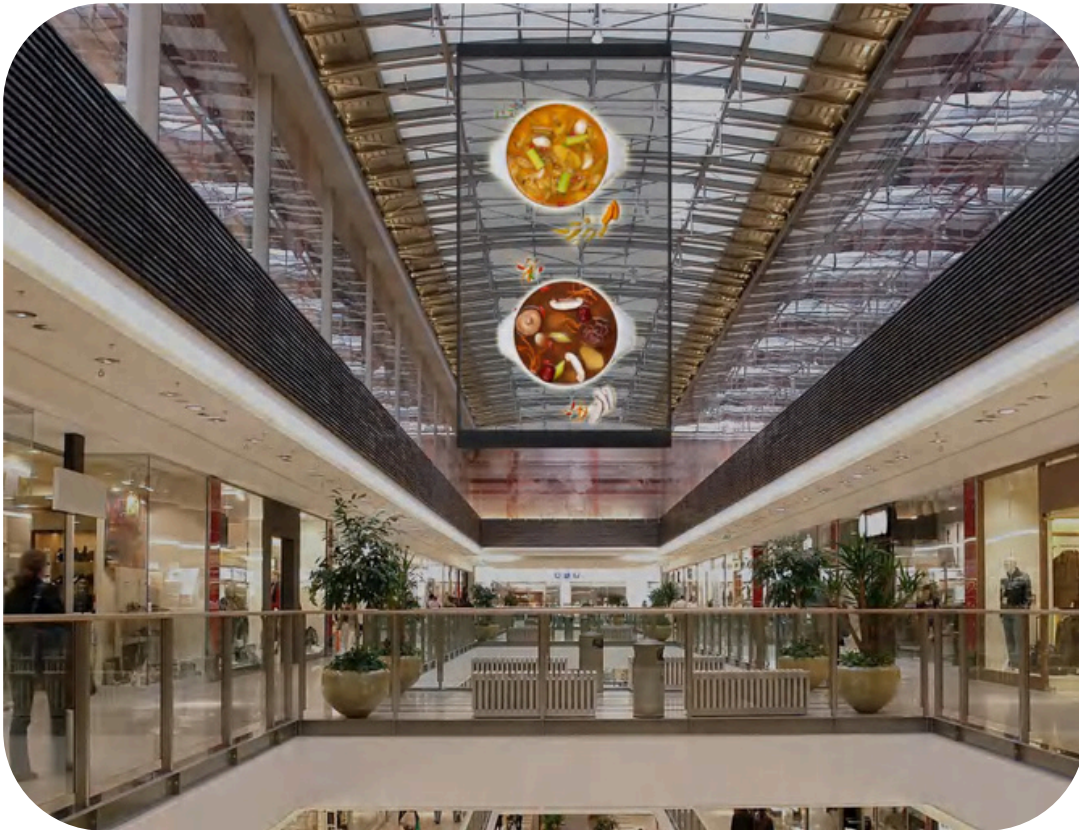


Corporate

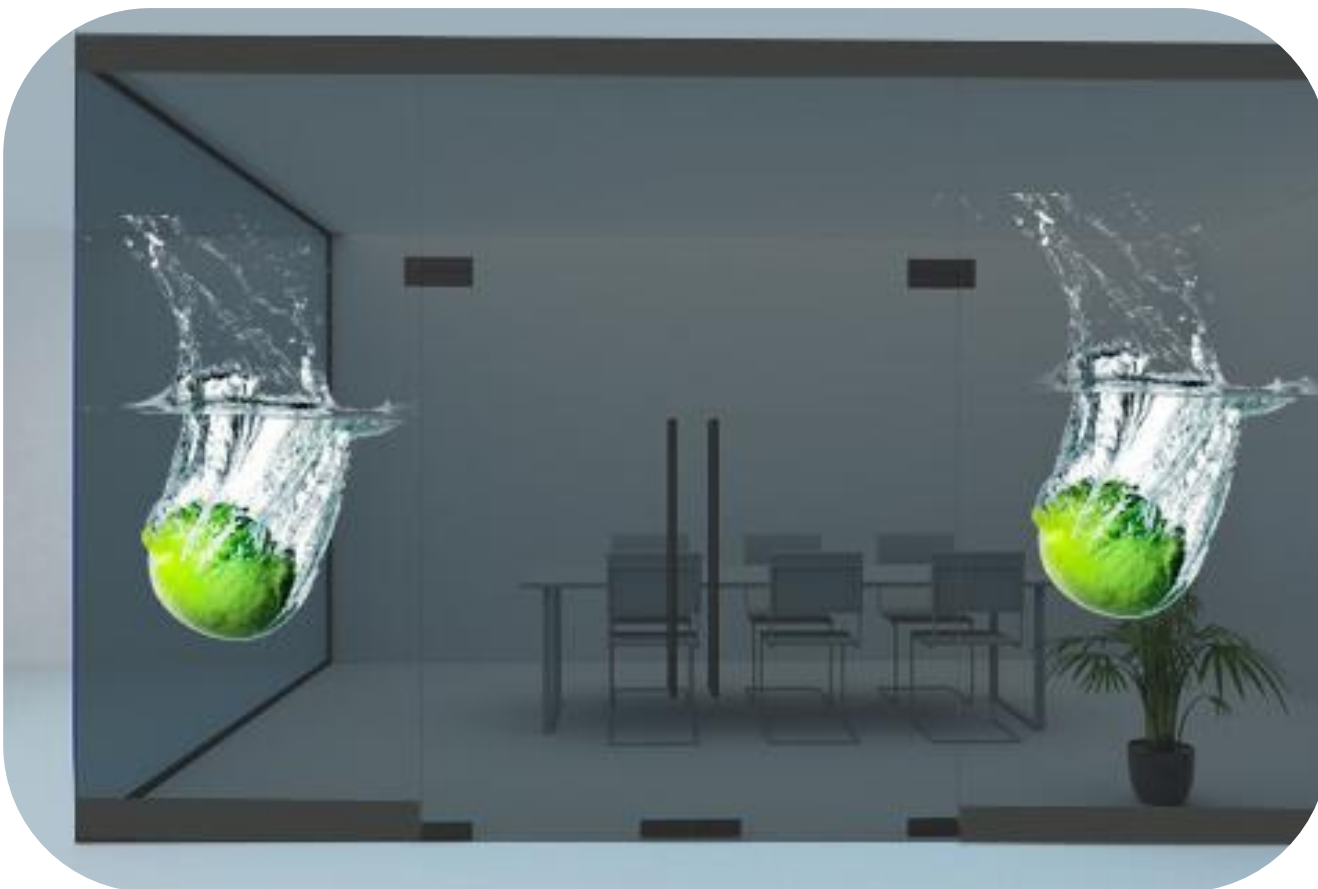

Application Scenarios

Corporate

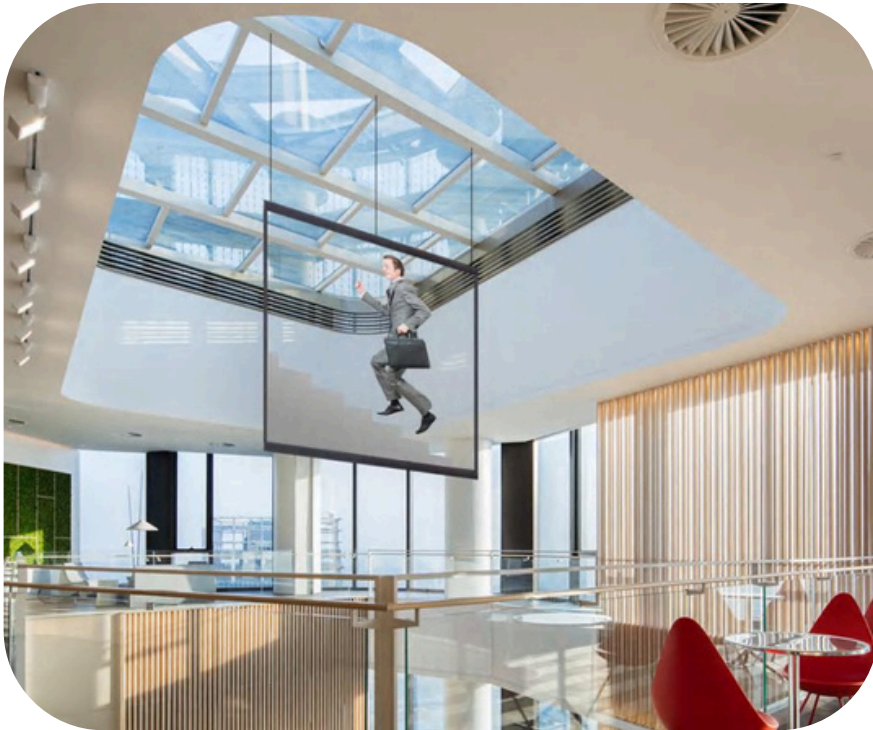

Trade Show & Showroom




Application Scenarios

Events




Airports & Transportation

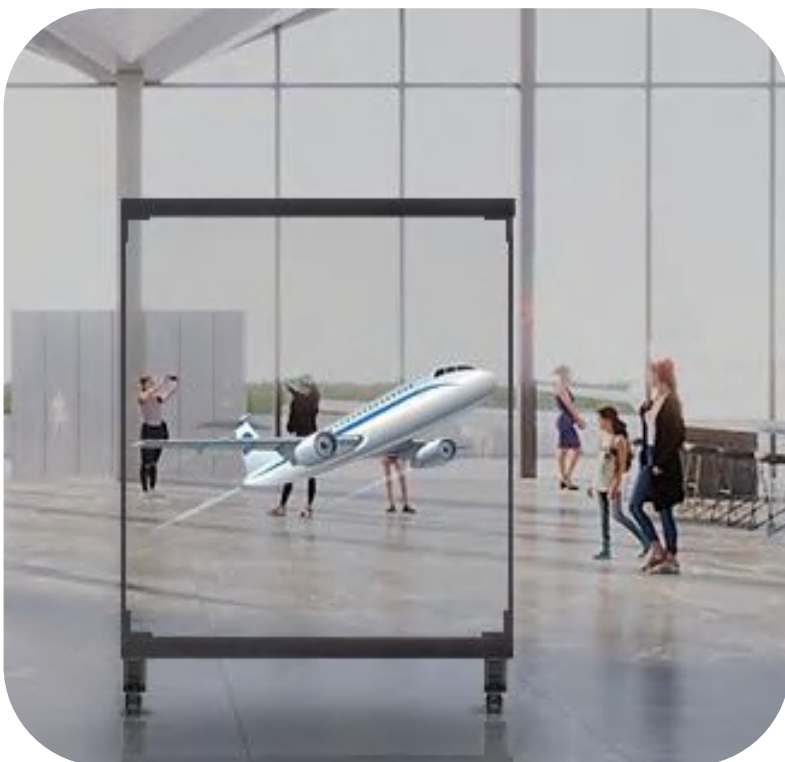

Glue
on
Glass



Ultra-clear and ultra-thin, high-transparency and high-temperature resistant high-end materials are used. The light board is perfectly designed to easily achieve a permeability of up to 80%. The overall mounting without a structural skeleton, the screen body can be spliced left and right, up and down, and can achieve a display height or width of 2.4-3 meters. Suitable for commercial windows, glass curtain walls, and other indoor and outdoor scenes.

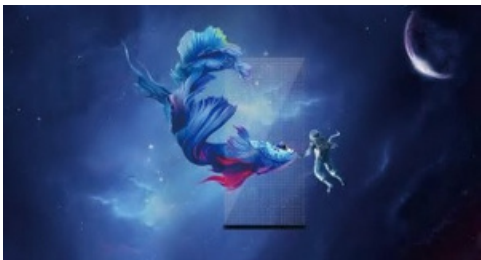

Model	M2. 5	M3.91	M6.25	M10
Pixel Pitch (mm)	P2. 5/P2.5	P3.91/P3.91	P6.25/P6.25	P10/P10
Visual Transparency	70%	80%	90%	85%
Pixel Density (dot / m²)	160000	65536	25600	10000
Cabinet Size (mm)	125×1000/125×1200	1000x250 \ 1200x250	1500x250	260×1200/260×1500
Cabinet Resolution (dot)	50×400/50×480	256x64 \ 300X64	240X40	26×148
Weight (Kg / m²)	6.5	6	5	6.5
Brightness (cd/ m²)	0-1200	≥ 4000	≥ 5000	0-4000
Package Form	Light driver integrated package			
Scan Mode	Single point single control, static drive			
LED Lifespan	≥ 100,000.00 hours			
Grayscale	65536			
Maximum Power Consumption (w / m²)	800			
Average Power Consumption (w / m²)	200			
LED Controller	Synchronous/Asynchronous			
Input Current	AC100~240V 50/60 Hz			
Module Working Current	DC 4.2V ± 0.2V			

Professional
Display body products. The weight is only 6KG/square meter.

Mounted on transparent glass.

Free-standing

EzzyVUE LED poster, which is movable and detachable. Display modules can be increased or decreased at any time according to the usage environment like exhibition booths, stages, and other scenarios.



Hanging

The product is lightweight and easy to install for stage performances, door curtain shows, and other advertising scenes.



Holographic LED Screen Specs

Item	M3 All-in-one Machine	
Size(mm)	1000*2000	2000*2000
Pixel Pitch (mm)	H:3.91, V:3.91	H:3.91, V:3.91
Pixel Density (dot/ m²)	65,536	65,536
Profile Dimension (mm)	1021x2452*500	2021x2452*500
Dipslay Dimension(mm)	1000*2000	2000*2000
Resolution (dot)	256x512	512x512
Weight (Kg/SET)	37	58
Brightness(cd/ m²)	4,000	
Encapsulation Type	Combo Design	
Scanning	Static	
Lifespan	≥ 100,000.00 hours	
Pixel Configuration	RGB 3-In-1	
Grey Scale	65,536 (16bit)	
Average Power Consumption (W/ m²)	280	
Maximum Power Consumption (W/ m²)	800	
Control System	Colorlight	
Connection Type	Supporting WiFi / DVI / HDMI / DP / USB / RJ45 / Network Remote Control (Based on the controller model)	
Input Voltage	AC100~240V 50/60Hz	
Working Voltage for Module	DC4.7~5V ±0.2V	
Cabinet Material	Aviation Aluminum Alloy	
Maintenance Way	Front	
Installation Environment	Indoor	
Working Temperature & Humidity	Temperature: -10~40℃	Humidity: 10%-90% (Without condensation)
Installation Way	Mobile Bracket	

Holographic LED Screen Specs——Module

Project	M3 Module lamp board		Control Box	
Model	1.075*0.25M	1.2*0.25M	0.25M	0.5M
Weight(g)	450	550	900	1,900
Cabinet Size (mm)	1075*250	1200*250	250*64*52	250*64*52
Packing	Carton pearl cotton	Carton pearl cotton	Carton pearl cotton	Carton pearl cotton
Quantity per box (PCS/Box)	12	12	24	12
Carton dimensions (mm)	L1295 xW335 x H270			
Air Box transport packaging	Pack 4(2 * 2) cartons (1295 x 335 x 270 in height) per airbox			
	Air Box Dimensions: 1370 * 810 * 825mm			
Packing in wooden	Pack 1 carton per wooden case			
	Wooden box size 1360 * 400 * 420(mm)			
	Other packing methods, according to the carton size accumulation, width of each plus a carton plus 350mm, height of each plus a carton plus 280mm, for example: one pack four (2 * 2) , wooden box dimensions: 1360 * 750 * 700			
Note: 0.25 m control box can hold up to 36 pcs per carton, 0.5 m control box can hold up to 18 pcs per carton. To control the packing weight of each carton (should not exceed 25 kg) , it is recommended to plan the increase or decrease of the actual packing quantity according to the quantity of control boxes required for the order, for example: a order for 260.5 m control boxes can be packed at 13 pcs/box.				



+971 54 213 3869

✉ ezzyvue.display@gmail.com

🌐 <https://aktc.co/ezzy/>

🌐 <https://www.linkedin.com/company/ezzyvue/>

